



# COMPACT CENTRIFUGE Z 206A



**Rotor/Bucket**



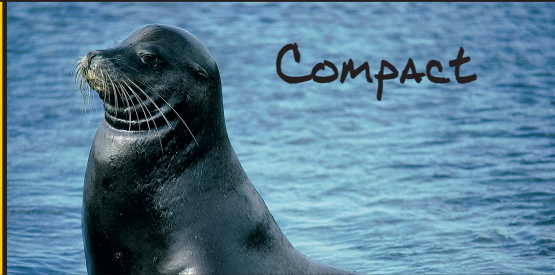


Angle rotor 12 x 15 ml  
Angle: 32°



Order No.: 221.54 V01

**Adapters**

max. speed: 6000 rpm  
RCF-value: 4427 xg  
max. radius: 11,0 cm  
Acceleration time in s: 33 / 95  
Deceleration time in s: 51 / 257







15 ml Falcon	15 ml	7 ml	5 ml	1,5 / 2,0 ml
				
17 without	17 without	13 701.011	13 701.012	11 701.015
121	105-120	100	65-75	42
Adapter Order No.:				

Angle rotor 6 x 50 ml  
Angle: 40°



Order No.: 221.55 V01

max. speed: 6000 rpm  
RCF-value: 4427 xg  
max. radius: 11,0 cm  
Acceleration time in s: 41 / 91  
Deceleration time in s: 52 / 247




50 ml Falcon	50 ml RB/OR	30 ml	16 ml	15 ml Falcon	15 ml
					
29 without	29 without	25 708.019	18 708.003	17 708.030	17 708.030
116	100-120	100	100-105	121	97-120
Adapter Order No.:					

Angle rotor 18 x 1,5/2,0 ml  
Angle: 45°



Order No.: 220.95 V06

max. speed: 6000 rpm  
RCF-value: 2938 xg  
max. radius: 7,3 cm  
Acceleration time in s: 11 / 60  
Deceleration time in s: 10 / 30


1,5 ml	0,5 ml	0,4/0,2 ml
		
11 without	8 704.005	6 704.004
Adapter Order No.:		

Swing out rotor 6 x 5 ml  
Angle: 0-90°



Order No.: 220.68 V04

max. speed: 4000 rpm  
RCF-value: 1896 xg  
max. radius: 10,4 cm  
Acceleration time in s: 8 / 35  
Deceleration time in s: 7 / 25

5 ml

13 75 without
Adapter Order No.:

The Z 206 A accepts up to 12 x 15 ml conical and round bottom tubes.  
For tubes with smaller dimensions we offer several adapters.  
For larger volumes we offer an angle rotor for 6 x 50 ml conical and round bottom tubes.



- Specifications**
- Microprocessor with LCD display
  - Electrical lid lock
  - Pre-selection of the rotor type
  - Active imbalance-identification and -cut off
  - Manufactured according to international safety regulations
  - Noise level under 60 dBA at max. speed
  - A large variety of rotors and accessories
  - Easy change of rotors



- Distinct Control Panel**
- Simple one handed operation
  - Easy to program with gloves on
  - Foil keyboard
  - Permanent indication of preset and actual values
  - Selection of speed in both rpm and g-force, with increments of 50/10
  - 10 acceleration and deceleration rates
  - Pre-selection of the running time from 10 s to 99 h 59 min or continuous

**Technical Data**

max. speed:	6000 rpm	Dimensions (wxhxd):	28 x 26 x 37 cm
max RCF:	4427 xg	Weight:	15 Kg
max. volume:	6 x 50 ml	Power consumption:	100 W
Speed Range:	200 - 6000 rpm with 50 rpm increments	Order numbers:	
Running time:	59 min 50 s / 10 s increments 99 h 59 min / 1 min increments	306.00 V01 - Z 206 A, 230 V / 50 - 60 Hz	306.00 V02 - Z 206 A, 120 V / 50 - 60 Hz



**HERMLE Labortechnik GmbH**  
Siemensstraße 25 • 78564 Wehingen - Germany  
Phone: + 49 7426/9622-11 • Telefax: + 49 7426/9622-49  
E-Mail: [vertrieb@hermleLT.de](mailto:vertrieb@hermleLT.de) • Internet: [www.hermle-labortechnik.de](http://www.hermle-labortechnik.de)



# Additional Information for leaflet Z 206 A

## New Rotor 221.37 V01 for 4 x 4-7 ml Vacutainer tubes!

Order No.: 221.37 V01



Swingout rotor: 4 x 4-7 ml  
Angle: 0-77°

Ø Tubes in mm:  
Length in mm:  
Adapter Order no.:

Acceleration in s: 16/105  
Deceleration in s: 12/23  
max. Speed: 6000 rpm  
RCF: 4467 xg  
max. Radius: 11.1 cm  
max. Ø: 13 mm

4 - 7 ml  
*Vacutainer*



13  
100  
without